



TECHNICAL SPECIFICATIONS

Pneumatic Forklift Trucks

D15S / D18S-5 & D20SC-5

1,500kg to 2,000kg Capacity

PRO5

SERIES

PRO5

SERIES



D15S / D18S-5 & D20SC-5
1,500kg 1,750kg 2,000kg
Diesel, Pneumatic Tires



EUD18S5-160426V2EN (April, 2016)



Doosan Industrial Vehicle Europe nv
Europark-Noord 36A
9100 Sint-Niklaas, Belgium

Tel: +32 3 760 09 87
Fax: +32 3 760 09 89
Website: www.doosan-iv.eu

AUTHORIZED DEALER


Product and specifications are subject to improvement and change without notice.

GENERAL SPECIFICATIONS

CHARACTERISTICS							
1	Manufacturer		Doosan	Doosan	Doosan		
2	Model		D15S-5	D18S-5	D20SC-5		
3	Capacity	at rated load center	kg	1,500	1,750	2,000	
4	Load center	distance	mm	500	500	500	
5	Power type	electric, diesel, gas, LPG-gas		diesel	diesel	diesel	
6	Operator type	stand-on, driver-seated		driver-seated	driver-seated	driver-seated	
7	Tires	C=cushion, P=pneumatic, E=Solid		P	P	P	
8	Wheels (x=driven)	number of front/rear		X 2/2	X 2/2	X 2/2	
DIMENSIONS							
9	Lift with STD two-stage mast	maximum fork height with rated load	mm	3,300	3,300	3,300	
10		free lift	mm	135	135	140	
12	Fork Carriage	ISO class		II	II	II	
13	Forks	thickness x width x length	mm	900 x 100 x 35	900 x 100 x 35	900 x 100 x 35	
		fork spacing (minimum x maximum)	mm	240 x 905	240 x 905	240 x 905	
14	Tilt of mast	forward/backward	deg	6 / 8	6 / 8	6 / 8	
15-20	Overall dimensions	length to fork face	mm	2,170	2,215	2,250	
		width	mm	1,070	1,070	1,070	
		mast lowered height	mm	2,185	2,185	2,185	
		mast extended height	mm	4,355	4,355	4,360	
		overhead guard height	mm	2,170	2,170	2,170	
19		seat height	mm	1,005	1,005	1,005	
21	Outside turning radius		mm	1,977	2,022	2,050	
22	Load moment constant		mm	394	394	399	
23	90° stacking aisle (add load length & clearance)		mm	2,360	2,398	2,422	
PERFORMANCE							
24	Speed	travel, loaded/unloaded	km/h	19 / 20	19 / 20	19 / 20	
25		lift, loaded/unloaded	mm/s	600 / 630	600 / 630	600 / 630	
26		lowering, loaded/unloaded	mm/s	500 / 450	500 / 450	500 / 450	
28	Drawbar pull	at 1.6km/hr, loaded/unloaded	kg	1,400	1,400	1,400	
30	Gradeability	at 1.6km/hr, loaded/unloaded	%	32	30	29	
WEIGHT							
32	Total weight, unloaded		kg	2,880	3,090	3,250	
33	Axle load	with load, front/rear	kg	3,800 / 580	4,165 / 677	4,545 / 705	
34		with unload, front/rear	kg	1,340 / 1,560	1,290 / 1,840	1,260 / 1,990	
CHASSIS							
35		number of front/rear		2 / 2	2 / 2	2 / 2	
36	Tires	front size		6.50x10-12	6.50x10-12	6.50x10-12	
		rear size		5.00x8-10	5.00x8-10	5.00x8-10	
38	Wheel base		mm	1,400	1,400	1,400	
39	Tread	front/rear	mm	890 / 910	890 / 910	890 / 910	
40	Ground Clearance	loaded, the lowest point	mm	120	120	120	
41		loaded, center of wheelbase	mm	150	150	150	
42	Service brake			foot / hydr	foot / hydr	foot / hydr	
43	Parking brake			hand / mech	hand / mech	hand / mech	
DRIVE							
45	Battery	voltage/capacity	V/AH	12 / 60	12 / 60	12 / 60	
49	Engine	manufacturer/model		Kubota/V2403	Kubota/V2403	Kubota/V2403	
50			rated output / rpm	kw	34.2 / 2,400	34.2 / 2,400	34.2 / 2,400
51			max. torque / rpm	N-m	15.9 / 1,600	15.9 / 1,600	15.9 / 1,600
52			cycle/cylinders/displacement	cc	4 / 2,434	4 / 2,434	4 / 2,434
55	Transmission	type		powershift	powershift	powershift	
		number of speeds forward/reverse		1 / 1	1 / 1	1 / 1	
57	Operating pressure	system/attachment	bar	176 / 176	199 / 199	216 / 216	

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions. Products and specifications are subject to improvement and change without prior notices.

DIMENSIONAL DRAWING

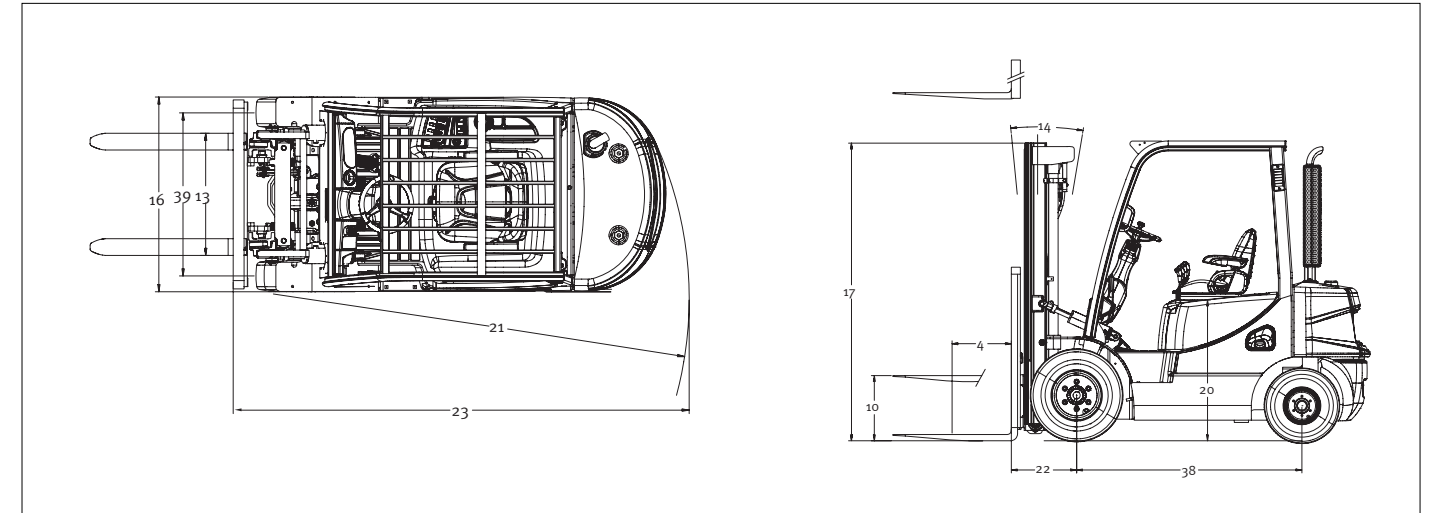

MAST SPECIFICATIONS and RATED CAPACITIES

D15S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height With Load Backrest	Free Lift With Load Backrest	Rated Load Capacities		
					D/G15S-5		Load Capacities LC 500mm
					Tilt Angle FWD	Tilt Angle BWD	
deg	deg	kg					
STD	3000	2035	4055	135	6	8	1500
	3300	2185	4355	135	6	8	1500
	3500	2285	4555	135	6	8	1500
	3700	2385	4755	135	6	8	1500
	4000	2585	5055	135	6	8	1500
	4500	2835	5555	135	6	8	1500
FF	2700	1885	3755	880	6	8	1500
	3000	2035	4055	1030	6	8	1500
	3300	2185	4355	1180	6	8	1500
FFT	4000	1915	5055	910	6	8	1500
	4500	2080	5555	1075	6	8	1475
	4750	2165	5805	1160	6	8	1425
	5000	2280	6055	1275	6	5	1400
	5500	2515	6555	1510	6	5	1275
	6000	2680	7055	1675	6	5	975

D18S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height With Load Backrest	Free Lift With Load Backrest	Rated Load Capacities		
					D/G18S-5		Load Capacities LC 500mm
					Tilt Angle FWD	Tilt Angle BWD	
deg	deg	kg					
STD	3000	2035	4055	135	6	8	1750
	3300	2185	4355	135	6	8	1750
	3500	2285	4555	135	6	8	1750
	3700	2385	4755	135	6	8	1750
	4000	2585	5055	135	6	8	1750
	4500	2835	5555	135	6	8	1750
FF	2700	1885	3755	880	6	8	1750
	3000	2035	4055	1030	6	8	1750
	3300	2185	4355	1180	6	8	1750
FFT	4000	1915	5055	910	6	8	1750
	4500	2080	5555	1075	6	8	1750
	4750	2165	5805	1160	6	8	1500
	5000	2280	6055	1275	6	5	1575
	5500	2515	6555	1510	6	5	1200
	6000	2680	7055	1675	6	5	900

D20SC-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height With Load Backrest	Free Lift With Load Backrest	Rated Load Capacities		
					D/G20SC-5		Load Capacities LC 500mm
					Tilt Angle FWD	Tilt Angle BWD	
deg	deg	kg					
STD	3000	2035	4060	140	6	8	2000
	3300	2185	4360	140	6	8	2000
	3500	2285	4560	140	6	8	2000
	3700	2385	4760	140	6	8	2000
	4000	2585	5060	140	6	8	2000
	4500	2835	5560	140	6	8	1675
FF	2700	1885	3760	880	6	8	2000
	3000	2035	4060	1030	6	8	2000
	3300	2185	4360	1180	6	8	2000
FFT	4000	1915	5060	910	6	8	2000
	4500	2080	5560	1075	6	8	1700
	4750	2165	5810	1160	6	5	1750
	5000	2280	6060	1275	6	5	1525
	5500	2515	6560	1510	6	5	1150
	6000	2680	7060	1675	6	5	850